


INSTRUCTIONS:

1. MAKE SURE MACHINE IS TURNED OFF, KEYS ARE REMOVED FROM IGNITION AND DISCONNECT NEGATIVE BATTERY CABLE BEFORE PROCEEDING.
2. REMOVE COVER FROM JUNCTION BOX.
3. ADD RED AND BLACK JUMPER WIRES TO PIN 1 & 2 WITH EXISTING WIRES.
4. REMOVE WIRES FROM PIN 3 ON BOTH SIDES OF FILTERS.
5. CRIMP INSULATED FASTONS TO WIRES THAT WERE REMOVED FROM PIN 3. (LEAVE EXISTING DIODE ON WIRE THAT GOES TO DISPLAY TO PREVENT BACK FEED).
6. WIRE RELAY AS SHOWN, EXTRA FASTON IS FOR PIN 87A ON RELAY TO PREVENT ACCIDENTAL CONTACT AFTER INSTALLATION.
7. CABLE TIE RELAY TO OTHER WIRES USING MOUNTING HOLE ON RELAY.
8. REINSTALL COVER.
9. CONNECT NEGATIVE BATTERY CABLE TO BATTERY.

REVISIONS				
SYM.	DESCRIPTION	EDR	DATE	DRAWN CHK'D.

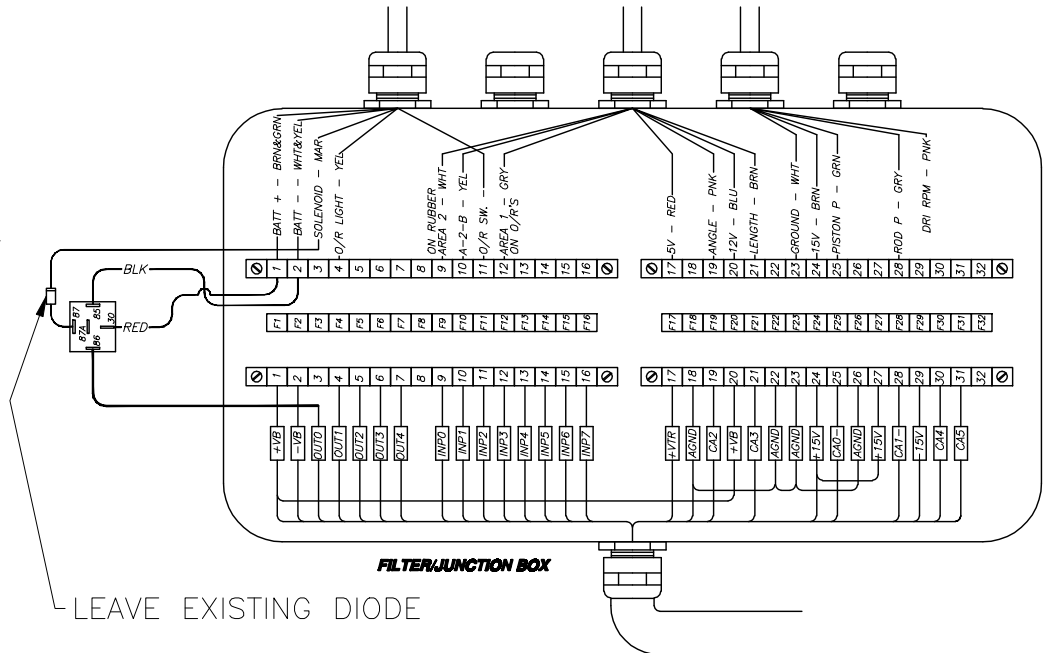

5	1	0-209-00063	CABLE TIE 7"
4	1	0-400-18011	RELAY, STD. SPDT 40A@12V W/ DIODE & BRACKET
3	5	0-400-02239	TERM, .250 FASTON 14-16GA. FEMALE INSULATED
2	6"	0-400-01307	WIRE, 16GA. RED
1	6"	0-400-01306	WIRE, 16GA. BLACK

ITEM	QTY.	PART NUMBER	DESCRIPTION
DRAWN		BEK	CHECKED
DATE		10/24/06	APPROVED
TOLERANCE UNLESS NOTED:			
FRACTIONS ± 1/16			
DECIMALS ± .015			
ANGLES ± 1'			
MACHINE SURFACES 125			
DO NOT SCALE THIS PRINT REMOVE ALL BURRS AND SHARP EDGES			
BRODERSON MANUFACTURING CORP. P.O. BOX 14770 LENEXA, KANSAS 66285			TITLE:
			FIELD KIT, 3B6 FILTER BOX
SCALE	WEIGHT	SIZE	NUMBER
N/A		A	813-00149
			REV.